

Clay Street & UPRR Grade Separation



Factsheet




PROJECT IMPROVEMENTS

The Riverside County Transportation Department, in conjunction with the City of Jurupa Valley, will complete the planned improvements for the Clay Street & Union Pacific Railroad (UPRR) Grade Separation Project. The project improvements on Clay Street extend approximately 0.33 miles from Van Buren Boulevard to the south to approximately 500 feet north of Linares Avenue to the north. Improvements for parts of Linares Avenue, General Drive and UPRR tracks are also included in this project.

The project includes the reconstruction of Clay Street to pass under the existing UPRR railway, the construction of a railroad bridge (60' wide, 104' – 7 5/8" long, two span) for the existing UPRR railway, and lowering grade elevations at General Drive and at Linares Avenue that will tie into the new lower Clay Street grade. In addition, an existing reinforced concrete storm drain within Clay Street will be replaced and a new traffic signal will be constructed at Linares Avenue.

The improvements will improve vehicular traffic circulation and safety as well as enhance the operational characteristics by eliminating conflicts between railroad operations and vehicular traffic.

PROJECT MAP

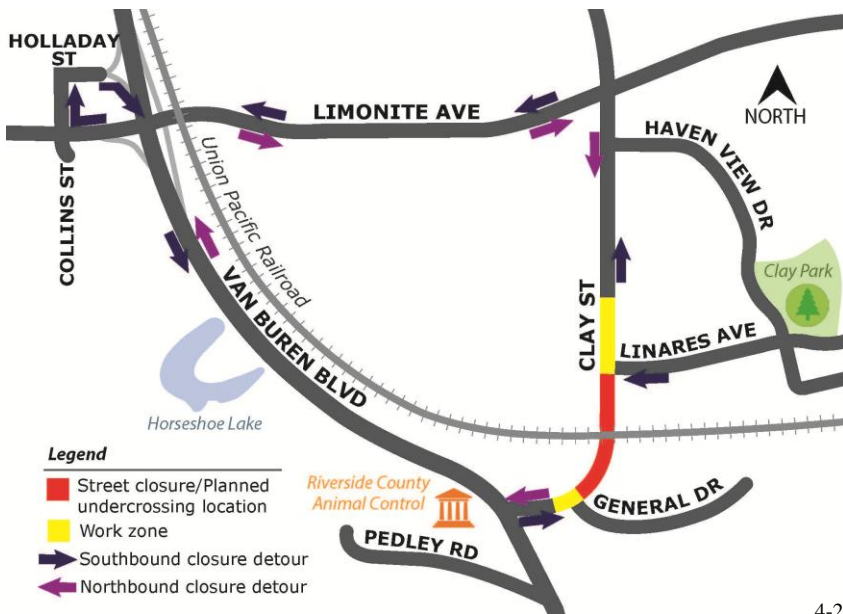

4-2-15

SCHEDULE

- ◆ **Construction Starts:** Mid-May 2014
- ◆ **Construction Completion:** Early 2016

FACTS

- ◆ **Project Construction Cost:** Approx. \$16 million
- ◆ **Contractor:** Ames Construction, Inc.

PROJECT BENEFITS

- ◆ Improve safety by eliminating train/vehicle conflicts.
- ◆ Improve vehicular traffic circulation and uninterrupted and efficient access for:
 - ▶ Motorists
 - ▶ Residents
 - ▶ Businesses
 - ▶ Pedestrians
 - ▶ Emergency vehicles
- ◆ Enhance operational characteristics such as speed, efficiency and reliability of freight and passenger trains by eliminating conflicts between railroad operations and vehicular traffic.

DETOURS

- ◆ **Southbound Detour:** Traffic will travel northbound on Clay St. to Limonite Ave., head westbound on Limonite Ave., northbound on Collins St., eastbound on Holliday St. to Van Buren Blvd. and southbound on Van Buren Blvd. to Clay St.
- ◆ **Northbound Detour:** Traffic will travel southbound on Clay St. to Van Buren Blvd., continue northbound on Van Buren Blvd. to Limonite Ave., and eastbound on Limonite Ave. to Clay St.

CONTACT

- ◆ Call the project Information Line: (877) 672-7765
- ◆ Visit the project website: www.rcprojects.org/claystreet



COUNTY OF RIVERSIDE
CALIFORNIA

